



Vanne à brides :

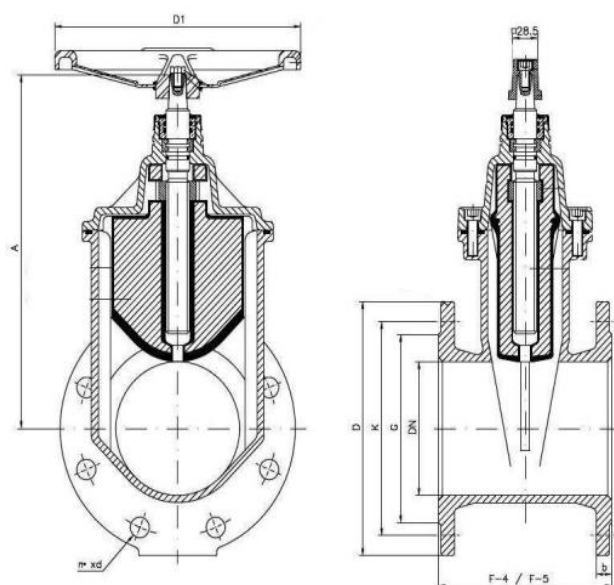

Dimensions disponibles :

DN	ISO 2531 PN 10				ISO 2531 PN 16				No.x d	DIN3202		Poids kg		Ø	s	o
	K	G	b	No.x d	D	K	G	b		F14 (F4)	F15 (F5)	F14 (F4)	F15 (F5)			
40	110	84	19	4x19	150	110	84	19	4x19	140	240	8	9	20	14,3	29
50	125	99	19	4x19	165	125	99	19	4x19	150	250	10	11	20	14,3	29
65	145	118	19	4x19	185	145	118	19	4x19	170	270	12,5	13,5	25	17,3	34
80	160	132	19	4x19	200	160	132	19	8x19	180	280	17	18,5	25	17,3	34
100	180	156	19	8x19	220	180	156	19	8x19	190	300	21	22,5	25	19	38
125	210	184	19	8x19	250	210	184	19	8x19	200	325	29,5	32	28	19,3	38
150	240	211	19	8x23	285	240	211	19	8x23	210	350	38	41	28	19,3	38
200	295	266	20	12x23	340	295	266	20	12x23	230	400	58	66	32	24,3	42
250	350	319	22	12x28	400	355	319	22	12x28	250	450	85,5	100,5	36	27,3	47
300	400	370	24,5	12x28	455	410	370	24,5	12x28	270	500	121	141	36	27,3	47
*350	460	429	24,5	16x28	520	470	429	26,5	16x28	290	550	136	150	36	27,3	47
350	460	429	24,5	16x28	520	470	429	26,5	16x28	290	-	208	-	40	27,3	47


Vannes à emboîtements lisses :

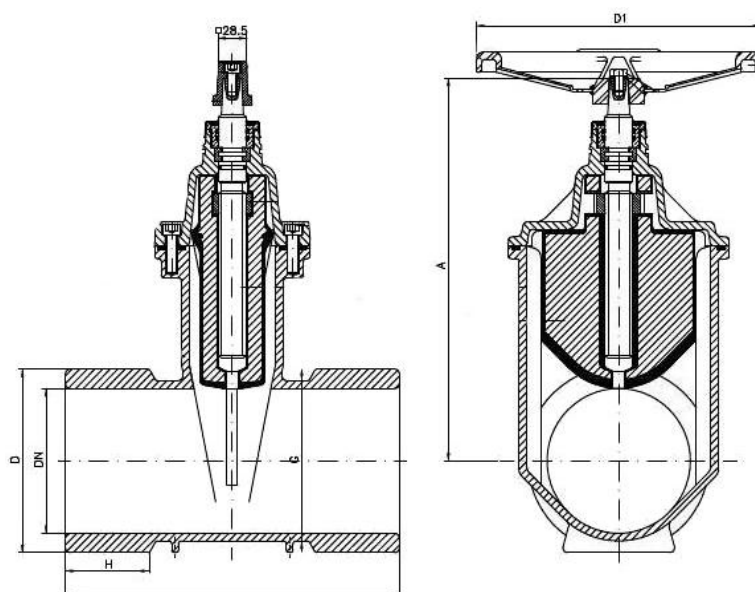

Dimensions disponibles :

DN	Ø					L	A
	A	B	C	D	E - F		
50	-	67	67	67	67	250	7
60	-	77	77	77	77	270	8,5
70	-	89	89	89	89	270	12,5
80	-	101	101	101	101	280	18,5
100	119	119	119	119	125	300	23
125	149	149	149	149	156	325	24
150	174	174	174	174	187	350	33
200	222	222	222	232	E-236	400	45
					F-249		
250	272	272	280	287	E-293	450	47
					F-311		
300	326	326	330	339	E-353	500	65
					F-360		


Vanne pour PVC :

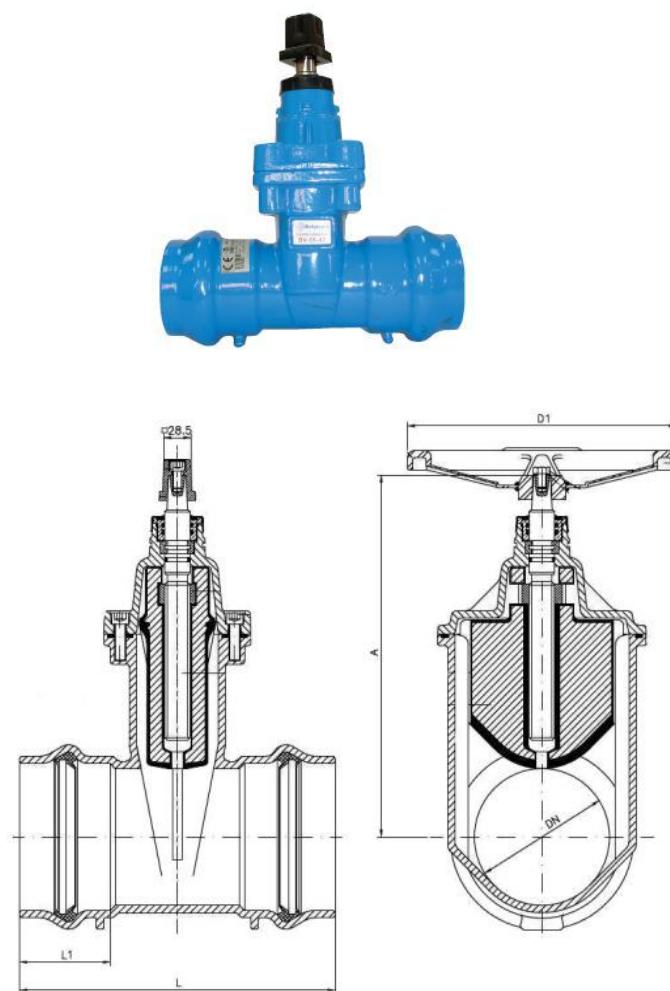

Dimensions disponibles :

DN	Ø	L	L1	A	D1	KG
50	63	250	77	208,5	125	7
65	75	270	80	245	150	8,5
80	90	280	84	287,5	175	12,5
100	110	300	88	317,5	200	18,5
125	125	325	91	367,5	250	23
125	140	325	91	367,5	250	24
150	160	350	94	408,5	300	33
200	200	400	100	496,5	350	45
200	225	400	100	496,5	350	47
250	250	450	125	589,5	400	65
300	315	500	140	664,5	500	90
400	400	600	150	970	630	190


Vanne Combi :

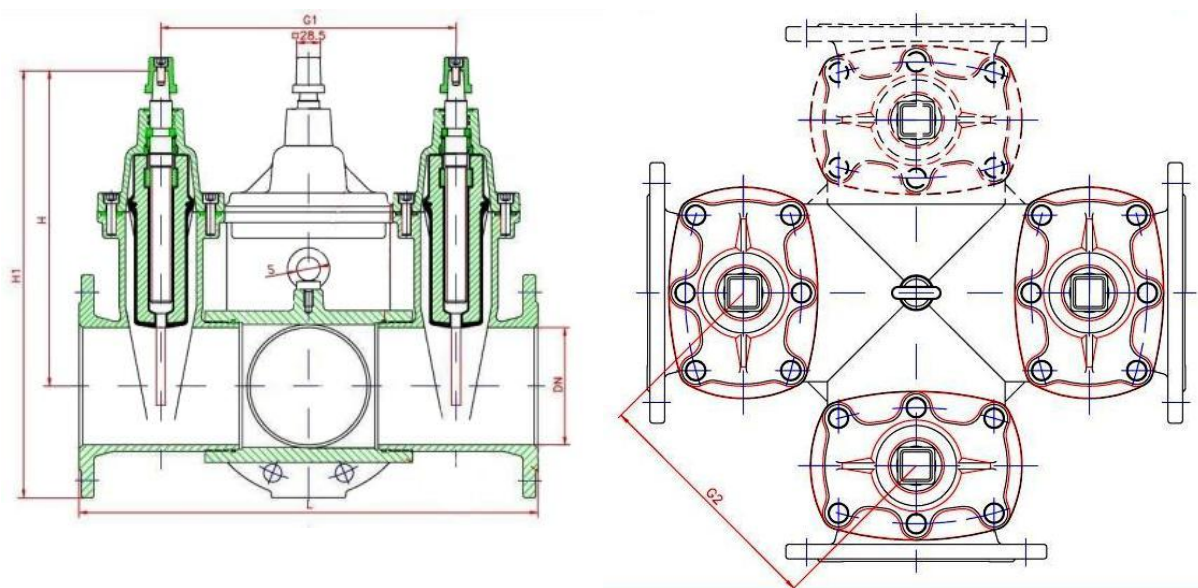

Dimensions disponibles :

DN	L	H	A	G1	G2	S	Kg B-3	Kg B-4
50	357	291	208,5	207	146	20	23	29
65	412	337,5	245	242	171	20	29	37
80	446	387,5	287,5	266	188	25	45	58
100	487	427,5	317,5	297	210	25	64	82
125	528	492,5	367,5	328	232	30	82	105
150	588	551	408,5	378	267	30	118	148
200	710	666,5	496,5	480	339	35	188	235
250	838	789,5	589,5	588	415	40	283	355
300	970	892	664,5	700	495	50	398	495

Vanne Combi Té :

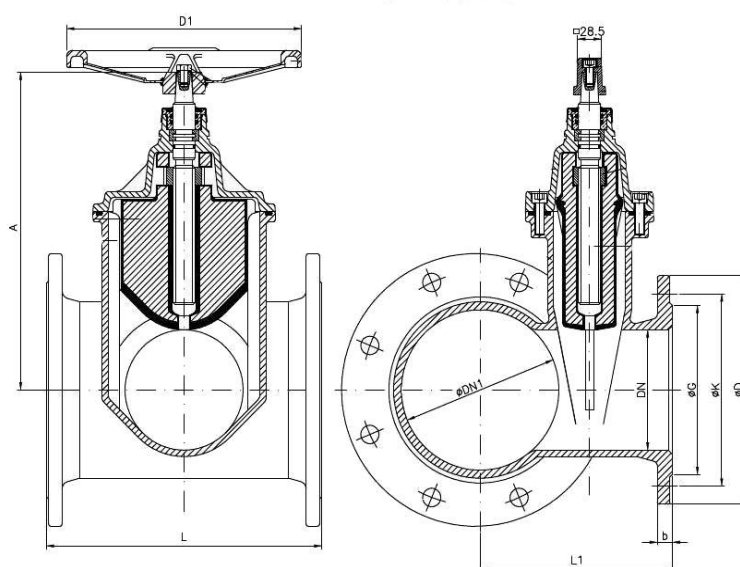

Dimensions disponibles :

<u>DN</u>	<u>ISO 2531 PN 10/PN 16</u>					<u>A</u>	<u>D1</u>	<u>DN1</u>
	<u>D</u>	<u>K</u>	<u>G</u>	<u>b</u>	<u>Noxd</u>			
80	200	160	132	19	8x19	287,5	175	<u>A</u>
100	220	180	156	19	8x19	317,5	200	<u>L1</u>
150	285	240	211	19	8x23	408,5	300	<u>L</u>
200	340	295	266	20	8x23	496,5	350	<u>DN</u>
					12x33			

<u>DN1</u>	80	100		150			200			
<u>A</u>	287,5	287,5	317,5	287,5	317,5	408,5	287,5	317,5	408,5	496,5
<u>L1</u>	165	175	180	200	205	220	225	230	245	250
<u>L</u>	280	280	300	280	300	350	280	300	350	400
<u>DN</u>	80	80	100	80	100	150	80	100	150	200